
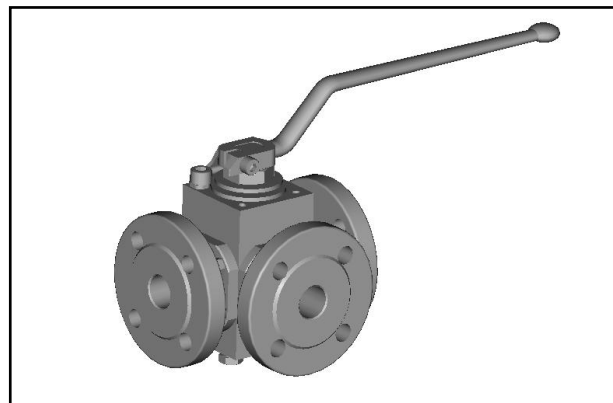












TOPI 310 3-Way-Ball-Valve



Possible switch positions for 90° actuators

		Feder rechtsdrehend	Feder linksdrehend	L-Bohrung	T-Bohrung				
Position		betätigt 90° 0° unbetätigt	unbetätigt 0° 90° betätigt						
									
Schaltstellung				L	T1	T2	T3	T4	

Please note the desired ball bore (L/T) and the switch positions (A/B/C) in the table:

PLT-Nr	
Nominal diameter	
Nominal pressure	
Ball bore	
Spring Direction of rotation	
Safety position = Unactuated	
Working position = Actuated	

Fill-in example:

PLT-Stelle	H1234
Nominal diameter	DN25
Nominal pressure	PN40
Ball bore	T3
Spring Direction of rotation	right
Safety position = Unactuated	B-C
Working position = Actuated	A-B